
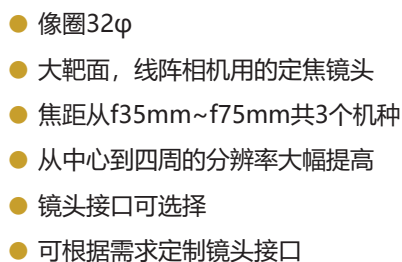


$\phi 21$ $\phi 28.6$ $\phi 32$


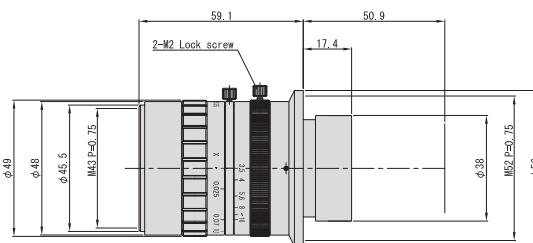


VS-HX5035

[illegible]

规格	VS-HX3535	VS-HX5035	VS-HX7535
焦距距离	35 mm	50 mm	75 mm
最大口径比	1: 3.5	1: 3.5	1: 3.5
光圈	F3.5 ~ 16	F3.5 ~ 16	F3.5 ~ 16
画角 (super35mm)	27.6° x 41.1°	19.7° x 29.4°	13.3° x 19.9°
最近WD	330.4 mm	488.8 mm	724.7 mm
TV失真 (Super 35mm)	-1.48 %	-0.63 %	-0.32 %
操作方法	Manual (Lock screw M2)	Manual (Lock screw M2)	Manual (Lock screw M2)
设计波长	Visible	Visible	Visible
接口	M 52 P = 0.75	M 52 P = 0.75	M 52 P = 0.75
凸缘衬圈	50.9 mm	50.9 mm	50.9 mm
适合芯片 (max.)	Super 35mm	Super 35mm	Super 35mm
滤镜口径	M 49 P = 0.75	M 43 P = 0.75	M 49 P = 0.75
重量	500 g	250 g	430 g

安装零件

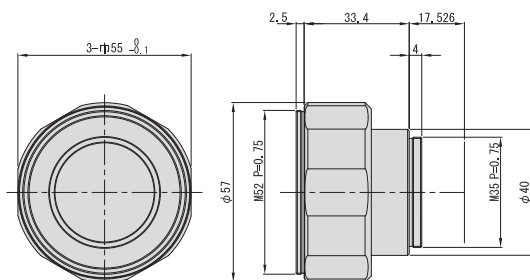VS-MR-M52/TFL**VS-MR-M52/M42-FB12**